

OPTIMUM QUALITY MAXIMUM RELIABILITY™



ZXT

BATTERY POWERED STRAPPING TOOL



The new ZXT 18V Li-ion battery-powered strapping tool features some of the most advanced benefits available on the market today.





ZXT

BATTERY POWERED STRAPPING TOOL

ZXT12

for use with 12mm polyester (PET/PP) material

ZXT19

for use with 19mm polyester (PET/PP) material

ZXT16

for use with 16mm polyester (PET/PP) material

Features include:

- > Patented brushless single motor design for extremely long service life.
- > New 18V 4000mAh high-capacity battery for increased productivity.
- > ZXT19 has a tension range of up to 400kg.
- > Patented strap gripper design for improved tension.
- > Single handed operation.
- > Soft mode for light or fragile packages.
- > Lightest model in its class (3.5Kg including battery).
- > Digital touch panel pre-programmed for different applications.
- > Suitable for PP* and polyester strapping.
- > Extremely simple strap feed, with both straps being inserted together.
- > Strap is tensioned, sealed and cut in one operation.



ZXTBAT-R
Replacement 18V Li-ion
Battery for ZXT12, ZXT16
and ZXT19 Tools



Suitable for use with polypropylene strapping



Suitable for use with polyester strapping



Suitable for engineering industry applications



Heat weld seal - no need for metal seals



Strapping tension range



Suitable for brick/concrete industry applications



Battery powered



Suitable for timber industry applications



Total machine weight





Suitable for carton strapping applications



Specifications

Machine Weight:	3.5 kg
Machine Dims:	330 x 150 x 125 w x d x h (mm)
Strap Widths (mm):	12, 16, 19, (9mm on request)
Min/Max PP Thickness:	0.7mm - 1.27mm
Min/Max PET Thickness:	0.4mm - 1.27mm
Min/Max Tension:	200-400 kg (Strap/Model Dependent)
Speed/Cycle:	3.5 secs (@50Hz if applicable)
Power Requirement:	100-240v 50-60Hz
Power Consumption:	140w
Cycles per Charge:	up to 440
Charge Time:	30 mins

*Please note that the number of strapping cycles obtained from a full battery will vary depending on quality and specification of strap, length of slack taken up during tensioning, strap tension and sealing time settings, ambient conditions and operator technique.

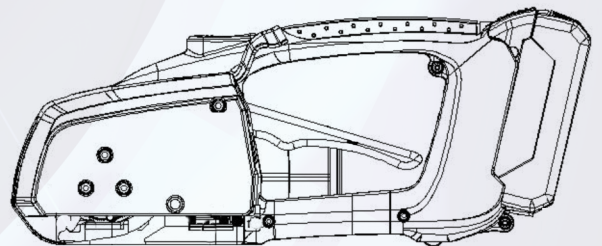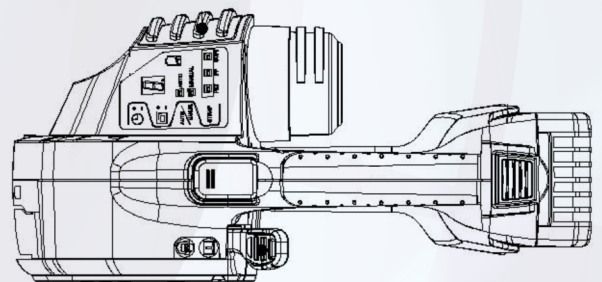

For more information on the complete range of Optimax® packaging products, please contact your authorised Optimax® distributor or visit:

www.optimaxproducts.com

©Copyright Optimax 2015
We reserve the right to change product specifications without prior notice
Re-order Code: LIT-PSP018

